


## Surface Mount General Purpose Silicon Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 1 A

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

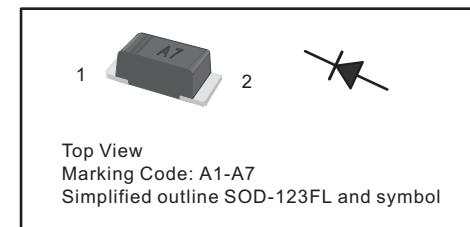

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.


Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	1N4001	1N4002	1N4003	1N4004	1N4005	1N4006	1N4007	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_a = 65^\circ C$	$I_{F(AV)}$	1							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load JEDEC Method )	$I_{FSM}$	25							A
Maximum Instantaneous Forward Voltage at 1A	$V_F$	1.1							V
Maximum DC Reverse Current $T_a = 25^\circ C$ at Rated DC Blocking Voltage $T_a = 125^\circ C$	$I_R$	5 100							$\mu A$
Typical Junction Capacitance 1)	$C_j$	4							pF
Typical Thermal Resistance 2)	$R_{\theta JA}$	180							$^\circ C/W$
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150							$^\circ C$


1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

2) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, P.C.B. mounted


**Fig.1 Forward Current Derating Curve**

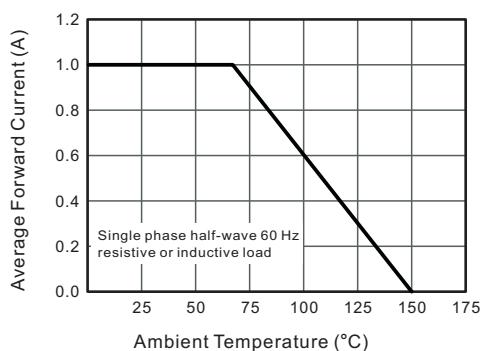


**Fig.2 Typical Instantaneous Reverse Characteristics**

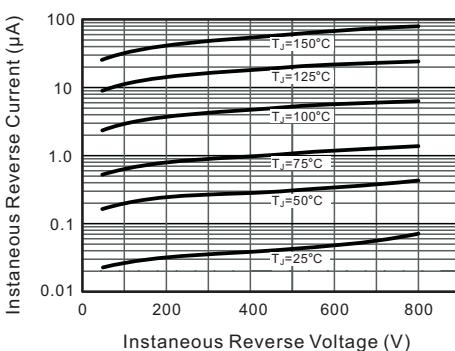

**Fig.3 Typical Forward Characteristic**

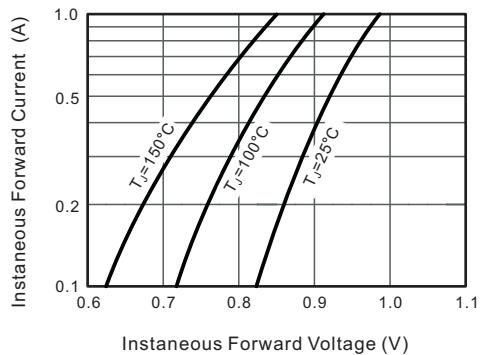


**Fig.4 Typical Junction Capacitance**

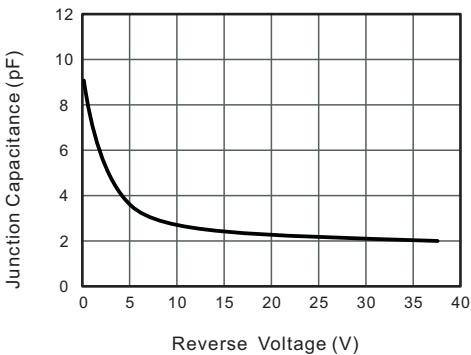


## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

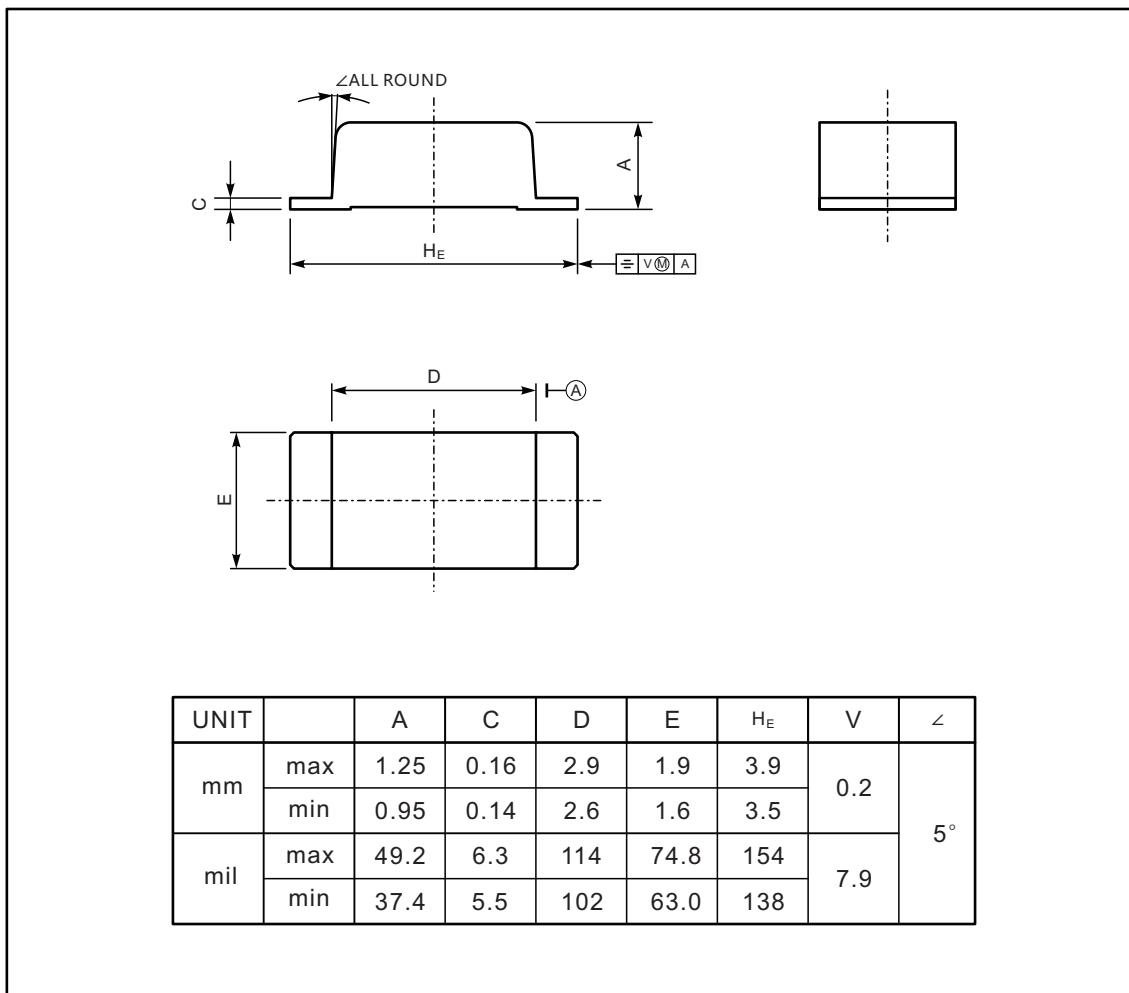


The recommended mounting pad size

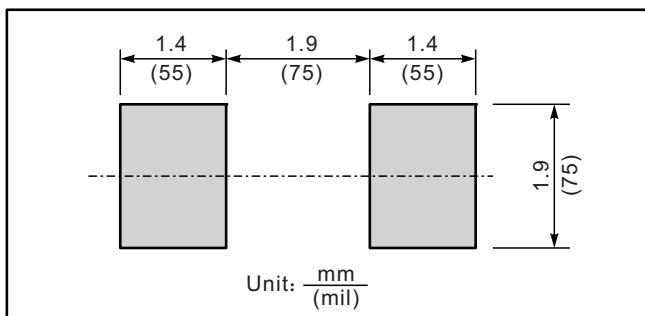


Marking

Type number	Marking code
1N4001	A1
1N4002	A2
1N4003	A3
1N4004	A4
1N4005	A5
1N4006	A6
1N4007	A7

- Recommended condition of flow soldering

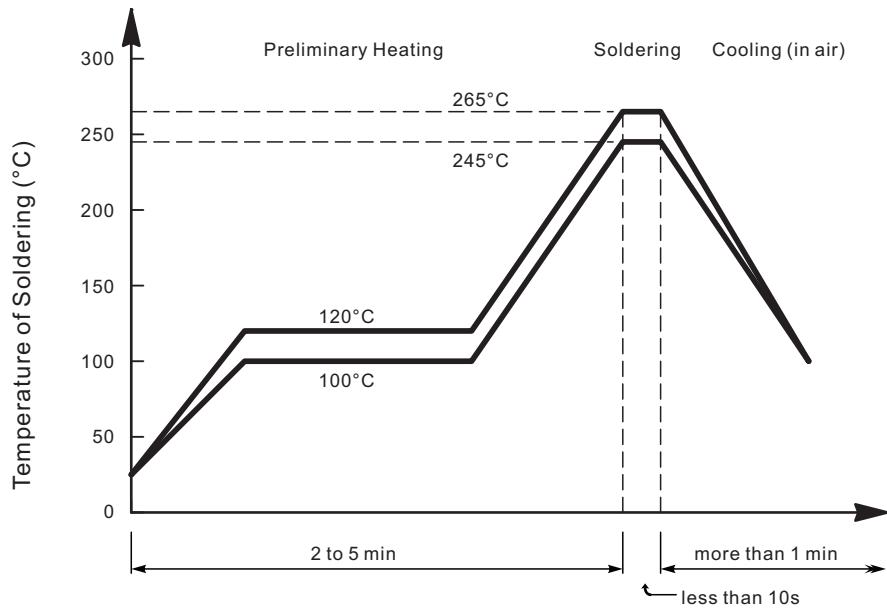

- Recommended condition of reflow soldering

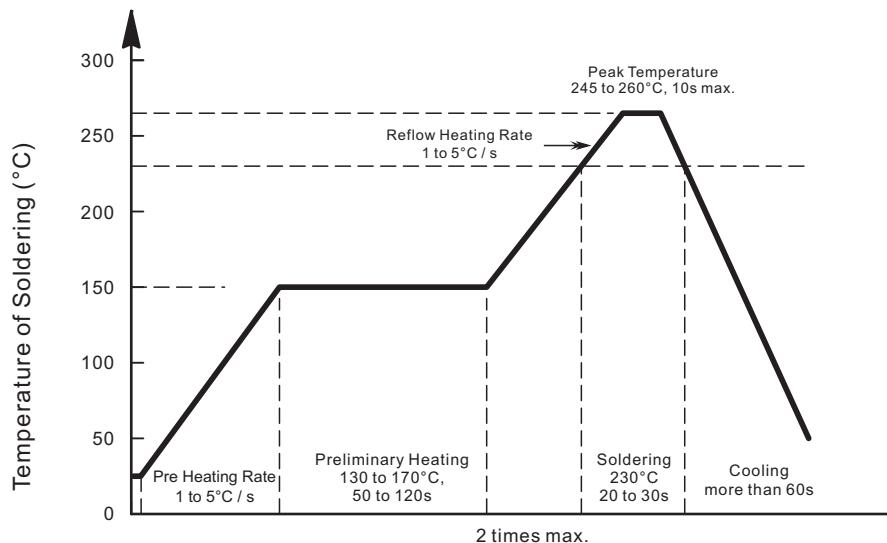

Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters; time length of peak temperature (longer), time length of soldering (longer), thickness of solder paste (thicker)

- Condition of hand soldering

Temperature: 370°C

Time: 3s max.

Times: one time

- Remark:

Lead free solder paste (96.5Sn/3.0Ag/0.5Cu)